
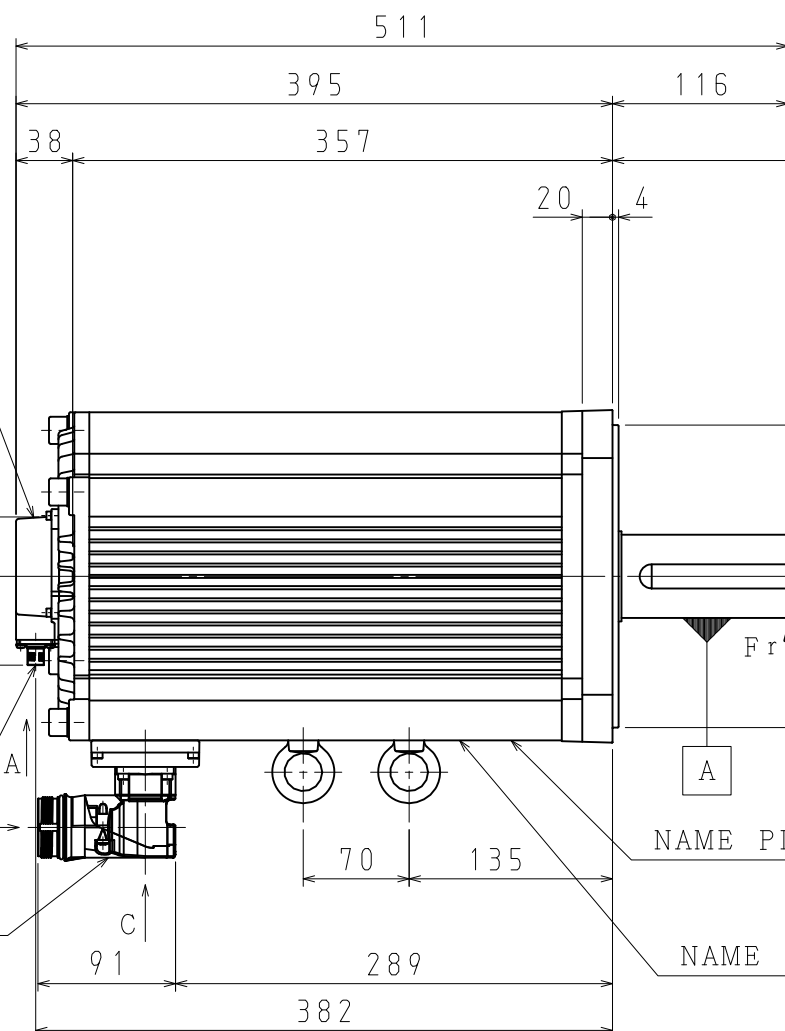
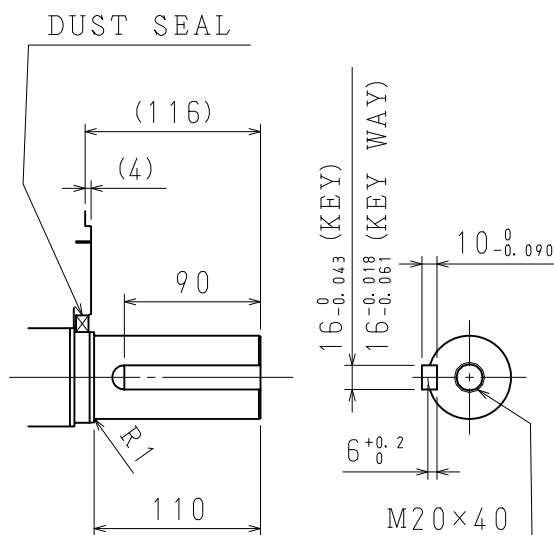




ENCODER
CONNECTOR


MOTOR
CONNECTOR

NAME PLATE




DETAIL OF SHAFT EXTENSION


1	PG5V
2	PG0V
3	FRAME GROUND
4	—
5	—
6	DATA (+)
7	DATA (—)
8	—
CON. CASE	FRAME GROUND




U	PHASE U
V	PHASE V
W	PHASE W
+	—
—	—
FG	FRAME GROUND
CON. CASE	FRAME GROUND



RECEPTACLE SIZE:M40
HOUSING:SM-5EPWN8AAD00S
MAKER:PHOENIX CONTACT

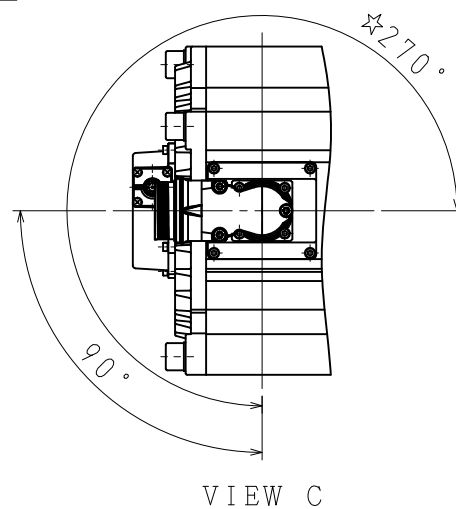

TYPE	RATED OUTPUT kW	RATED TORQUE N·m	TIME RATING	RATED SPEED min ⁻¹	VOLTAGE V _{rms}	RATED CURRENT A _{rms}	THERMAL CLASS	WEIGHT kg	ALLOWABLE RADIAL LOAD F _r N	ALLOWABLE THRUST LOAD F _r N
SGM7G-1EDFF6F	15	95.4	CONT.	1500	400 (3PHASE)	37.2	F	67.5	4998 (AT SHAFT END)	2156

F		 YASKAWA	DRWN.	H. SEKI	TITLE AC SERVOMOTOR Σ -7 SERIES	DRWN. DATE	17-02-15	REV.
			CHKD.	K. INOUE		DWG. NO.	900-204-468	
			SCALE 1 : 5	APRV.	T. HIROSE	SGM7G MODEL 15 kW		